

IP SPEAKER_{serial}

IS-640

IS-640P

IS-650

IS-660

IS-670




IS-640

IS-640P

IS-670


IS-660

IP speakers work stand-alone

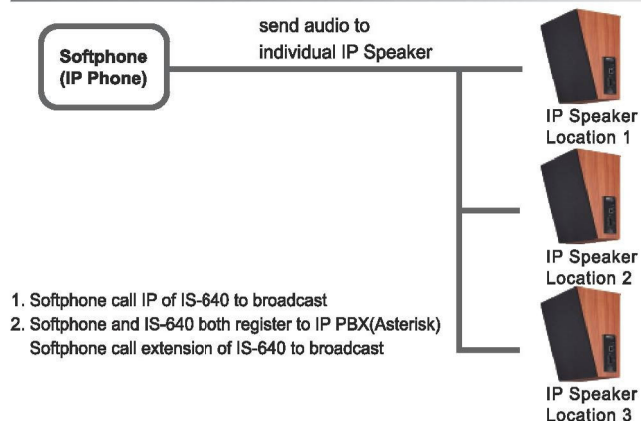

* compatible with IS serial IP speakers

IP Speakers work with IBS (IP Broadcasting System)

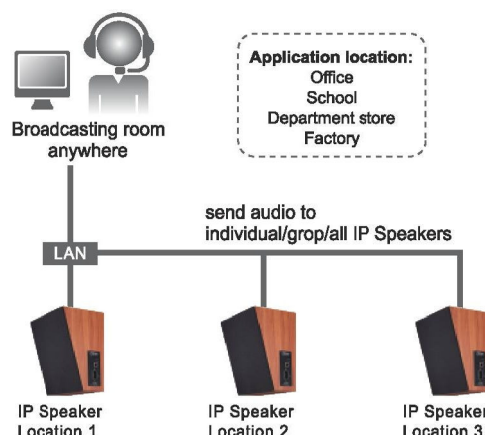

IP Speaker Specification

	Wood speaker		Horn speaker	Ceiling speaker	Wall speaker
Model No	IS-640	IS-640P	IS-650	IS-660	IS-670
Speaker	8"	8"	11x8"	5"	6.5"+2"
Dlm(cm)	17.5x28x24.5x9	17.5x28x24.5x9	28x20x28	19.8x16.6x11	27x15x19.5
Weight(g)	3000	2640	2500	900	2350
Impedance			8Ω		
Rated Power	40W	40W	30W	6W	30W
Power supply	110V-240V 1A	PoE(30W)			
Water Protection	---	---	IP66	---	IP55
Protocol	SIP(RFC2543,RFC3261)				
Codec	G.711 u-Law,G.711 a-Law				
LAN connection	RJ45 10/100 Mbps				
Warranty	1 Year				